



**E. ARTHUR BROWN**

*Company, Inc.*


## **PeepRib® Sight System for Traditions Vortek, And Pursuit Wolf**

### **Preliminary Instruction Sheet for Installation and Use**

1. Loosen the slide set screw on the slide and push the slide all the way up and off the dovetail ramp. You are now ready to mount the PeepRib® base to your Rifle.
2. Note that the PeepRib® base has 3 mounting screw holes.
3. Remove all 4 plug screws so that there is no interference with the base. Use the 3 scope mount holes in the barrel that positions the sight correctly. NOTE: The mount hole in the barrel closest to the breach is **not used**. The PeepRib Sight base is a solid, one piece scope mounting base. A one-piece base gives better rigidity and alignment.
5. Clean the mounting holes on your barrel and the PeepRib® mounting screws with Acetone to degrease them.
6. Put a drop of blue Loctite on the screw threads and screw the PeepRib® base onto your barrel making sure it is square with the receiver. (A carpenter's square is handy).
7. Slip the aperture slide back onto the dovetail ramp. Set the height about medium low to start and snug up the set screw.

### **Scope Mounting on the PeepRib®**

1. Use Weaver style or Picatinny scope rings. A "High" ring is recommended to give best thumb clearance over the hammer as well as best clearance for the PeepRib® aperture.
2. Do not remove or move your PeepRib® aperture to make the scope fit. Cause a fit by either forward and backward positioning or by raising and lowering scope ring height.
3. The object of the PeepRib® is to allow your peep sight settings to remain undisturbed when mounting a scope sight.

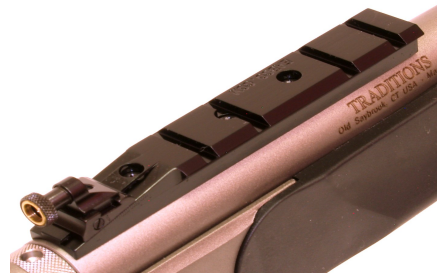

### **How to Sight In the PeepRib® Aperture**

1. Shoulder your unloaded rifle and sight through the peep so that the front sight is centered in the hole. This is the sight picture you will use for aiming.
2. Starting with a target at 25 yards, shoot a group of no less than three shots.
3. Adjustments are made by loosening the side set screw to slide the aperture up or down the ramp (elevation). Loosen the top set screw to slide the aperture left or right.
4. If the group is low, you will need to raise the PeepRib® aperture. Slide it upward on the dovetail ramp. Do the opposite if your group is too high.
5. If the group is too far left, you will need to slide the PeepRib aperture to the right, and slide it to the left if group is too far right.
6. SNUG the set screws after each adjustment. Do not over tighten.
7. Once the initial adjustments are made test fire another three shot group. Continue the adjustment process until the sights are aiming where you want the bullets to hit!



*Note: The PeepRib is also available for the TC Encore®, ProHunter, Omega, Triumph and Impact (Encore shown bottom right) Also available for the CVA Optima, Kodiak, Acura and wolf (CVA not shown).*

**E. Arthur Brown Company, Inc. • 4088 County Road 40 NW Garfield MN 56332**

Customer Service 800.950.9088 • email: sales@eabco.com • www.eabco.net